# Question 1(a) [3 marks]

Define the following terms: a). Data items b). Data dictionary c). Meta data

**Answer**:

| Term               | Definition  |  |
|--------------------|---|--|
| Data Items         | Basic units of data that cannot be subdivided further. Individual facts or values stored in database fields |  |
| Data<br>Dictionary | Centralized repository containing metadata about database structure, tables, columns, and relationships     |  |
| Metadata           | Data about data that describes structure, constraints, and properties of database elements                  |  |

Mnemonic: "DDM - Data Dictionary Manages"

# Question 1(b) [4 marks]

Explain disadvantages of File oriented system.

**Answer**:


| Disadvantage       | Description  |  |
|--------------------|--|--|
| Data Redundancy    | Same data stored in multiple files leading to storage waste  |  |
| Data Inconsistency | Different versions of same data in different files           |  |
| Data Isolation     | Difficulty in accessing data scattered across multiple files |  |
| Security Issues    | Limited access control and security mechanisms               |  |

Mnemonic: "RDIS - Really Difficult Information System"

# Question 1(c) [7 marks]

Describe the responsibilities of DBA in detail.

| Responsibility         | Details   |  |
|------------------------|---|--|
| Database Design        | Creating logical and physical database structures     |  |
| Security Management    | Implementing user access controls and data protection |  |
| Performance Monitoring | Optimizing database performance and query execution   |  |
| Backup & Recovery      | Ensuring data safety through regular backups          |  |
| User Support           | Providing technical assistance to database users      |  |
| System Maintenance     | Regular updates, patches, and system optimization     |  |

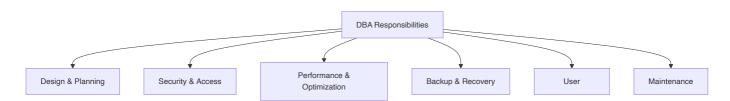

Mnemonic: "DSPBUM - Database Specialists Provide Better User Management"


# Question 1(c OR) [7 marks]

Define data abstraction? Explain Three level Architecture of DBMS.

#### **Answer**:

**Data Abstraction**: Process of hiding complex implementation details while showing only essential features to users.

| Level Description                    |                                      | Purpose                       |
|--------------------------------------|--------------------------------------|-------------------------------|
| External Level User view of database |                                      | Individual user perspectives  |
| Conceptual Level                     | Logical structure of entire database | Overall database organization |
| Internal Level                       | Physical storage details             | How data is actually stored   |

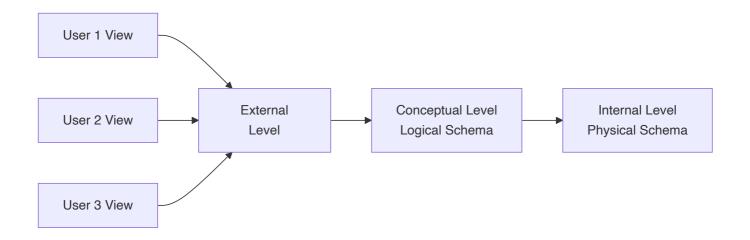

Mnemonic: "ECI - Every Computer Industry"

# Question 2(a) [3 marks]

Define the Following Terms :a). Relationship set b). Participation c). Candidate key

#### **Answer:**

| Term             | Definition   |  |
|------------------|--|--|
| Relationship Set | Collection of relationships of same type between entity sets                 |  |
| Participation    | Constraint specifying whether entity occurrence is mandatory in relationship |  |
| Candidate Key    | Minimal set of attributes that uniquely identifies each entity in entity set |  |

Mnemonic: "RPC - Relationship Participation Candidate"


## Question 2(b) [4 marks]

**Explain Generalization with example.** 

#### **Answer**:

**Generalization**: Bottom-up approach where common attributes of lower-level entities are combined into higher-level entity.

| Concept   | Description                                     |  |
|-----------|---|--|
| Purpose   | Reduce redundancy by creating common superclass |  |
| Direction | Bottom-up (specific to general)                 |  |
| Example   | Car, Truck, Bus → Vehicle                       |  |

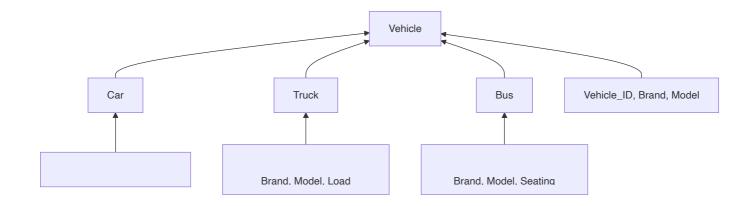

Mnemonic: "GBU - Generalization Builds Up"


# Question 2(c) [7 marks]

Define E-R diagram? Explain different symbols used in E-R diagram with example.

### Answer:

**E-R Diagram**: Graphical representation showing entities, attributes, and relationships in database design.

| Symbol       | Shape           | Usage                        | Example          |
|--------------|-----------------|------------------------------|------------------|
| Entity       | Rectangle       | Represents objects           | Student, Course  |
| Attribute    | Oval            | Properties of entities       | Name, Age, ID    |
| Relationship | Diamond         | Connections between entities | Enrolls, Teaches |
| Primary Key  | Underlined oval | Unique identifier            | Student_ID       |
| Multivalued  | Double oval     | Multiple values              | Phone_Numbers    |
| Derived      | Dashed oval     | Calculated attributes        | Age from DOB     |

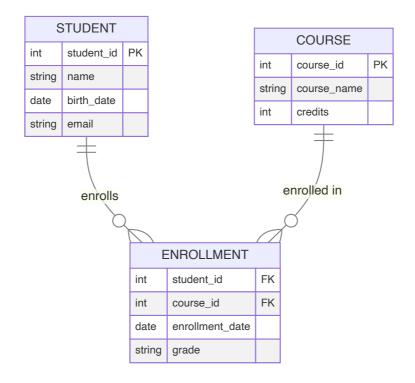

Mnemonic: "EARPM - Every Attribute Represents Proper Meaning"

### Question 2(a OR) [3 marks]

Define Relational Algebra? List out various operations in relational algebra?

**Answer:** 

**Relational Algebra**: Formal guery language with operations for manipulating relational database tables.

| Operation Type        | Operations  |  |
|-----------------------|---|--|
| Basic Operations      | Select, Project, Union, Set Difference, Cartesian Product |  |
| Additional Operations | Intersection, Join, Division, Rename                      |  |

Mnemonic: "SPUDC-IJDR - Simple People Use Database Concepts"


## Question 2(b OR) [4 marks]

Explain Specialization with example.

Answer:

**Specialization**: Top-down approach where higher-level entity is divided into specialized lower-level entities.

| Concept   | Description  |  |
|-----------|--|--|
| Purpose   | Create specialized subclasses with unique attributes |  |
| Direction | Top-down (general to specific)                       |  |
| Example   | Employee → Manager, Clerk, Engineer                  |  |

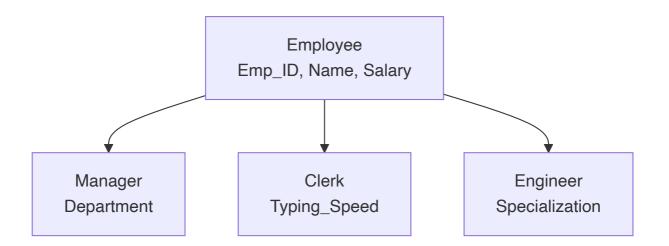

Mnemonic: "STD - Specialization Top Down"


# Question 2(c OR) [7 marks]

Define attribute? Explain different types of attributes with example.

**Answer**:

**Attribute**: Property or characteristic that describes an entity.

| Attribute Type Description                      |                            | Example                       |
|---|----------------------------|-------------------------------|
| Simple  | Cannot be divided further  | Age, Name                     |
| Composite                                       | Can be subdivided          | Address (Street, City, State) |
| Single-valued                                   | Has one value              | SSN, Employee_ID              |
| Multi-valued                                    | Can have multiple values   | Phone_Numbers, Skills         |
| <b>Derived</b> Calculated from other attributes |                            | Age from Birth_Date           |
| Key   | Uniquely identifies entity | Student_ID                    |

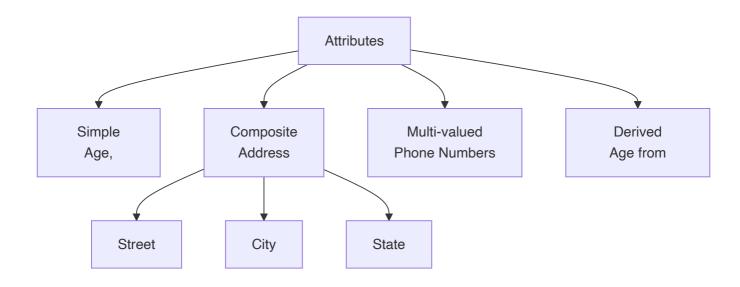

Mnemonic: "SCSMDK - Simple Composite Single Multi Derived Key"

# Question 3(a) [3 marks]

Explain the GRANT and REVOKE statement in SQL.

#### **Answer:**

| Statement | Purpose                       | Syntax Example                   |  |
|-----------|-------------------------------|----------------------------------|--|
| GRANT     | Provides privileges to users  | GRANT SELECT ON table TO user    |  |
| REVOKE    | Removes privileges from users | REVOKE SELECT ON table FROM user |  |

Common Privileges: SELECT, INSERT, UPDATE, DELETE, ALL

Mnemonic: "GR - Grant Removes (via REVOKE)"

# Question 3(b) [4 marks]

**Explain following Character functions. 1) INSTR 2) LENGTH** 

#### Answer:

| Function | Purpose                     | Syntax                              | Example                                  |
|----------|-----------------------------|-------------------------------------|--|
| INSTR    | Finds position of substring | <pre>INSTR(string, substring)</pre> | <pre>INSTR('Hello', 'e') returns 2</pre> |
| LENGTH   | Returns string length       | LENGTH(string)                      | LENGTH('Hello') returns 5                |

Mnemonic: "IL - INSTR Locates, LENGTH measures"

## Question 3(c) [7 marks]

### Write SQL statements for following table: Student(Enno,name,branch,sem,clgname,bdate)

Answer:

```
-- 1. Create a table Student
CREATE TABLE Student (
   Enno VARCHAR(10) PRIMARY KEY,
   name VARCHAR(50),
   branch VARCHAR(20),
   sem INT,
   clgname VARCHAR(100),
   bdate DATE
);
-- 2. Add a column mobno in Student table
ALTER TABLE Student ADD mobno VARCHAR(15);
-- 3. Insert one record in student table
INSERT INTO Student VALUES
('E001', 'Raj Patel', 'IT', 3, 'GTU College', '2003-05-15', '9876543210');
-- 4. Find out list of students who have enrolled in "IT" branch
SELECT * FROM Student WHERE branch = 'IT';
-- 5. Retrieve all information about student where name begin with 'a'
SELECT * FROM Student WHERE name LIKE 'a%';
-- 6. Count the number of rows in student table
SELECT COUNT(*) FROM Student;
-- 7. Delete all record of student table
DELETE FROM Student;
```

Mnemonic: "CAIRSCD - Create Add Insert Retrieve Search Count Delete"

# Question 3(a OR) [3 marks]

Explain equi join with example in SQL.

Answer:

**Equi Join**: Join operation using equality condition to combine tables.

| Join Type | Condition         | Result                         |
|-----------|-------------------|--------------------------------|
| Equi Join | Column1 = Column2 | Matching rows from both tables |

```
-- Example

SELECT s.name, c.course_name

FROM Student s, Course c

WHERE s.course_id = c.course_id;
```

Mnemonic: "EE - Equi Equals"

### Question 3(b OR) [4 marks]

Explain following Aggregate functions. 1) MAX 2) SUM

Answer:

| Function | Purpose               | Syntax      | Example     |
|----------|-----------------------|-------------|-------------|
| MAX      | Returns maximum value | MAX(column) | MAX(salary) |
| SUM      | Returns total sum     | SUM(column) | SUM(marks)  |

Mnemonic: "MS - MAX Sum"

# Question 3(c OR) [7 marks]

Write SQL statements for the following table: Employee(EmpID,Ename,DOB,Dept,Salary)

```
-- 1. Create a table Employee
CREATE TABLE Employee (
   EmpID VARCHAR(10) PRIMARY KEY,
   Ename VARCHAR(50),
   DOB DATE,
   Dept VARCHAR(30),
   Salary DECIMAL(10,2)
);
-- 2. Find sum of salaries of all employee
SELECT SUM(Salary) FROM Employee;
-- 3. Insert one record in Employee table
INSERT INTO Employee VALUES
('E001', 'John Doe', '1990-05-15', 'IT', 35000);
-- 4. Find names of employees who salary between 25000/- and 48000/-
SELECT Ename FROM Employee WHERE Salary BETWEEN 25000 AND 48000;
-- 5. Display detail of all employees in descending order of their DOB
SELECT * FROM Employee ORDER BY DOB DESC;
```

```
-- 6. List name of all employees whose name ends with 'a'
SELECT Ename FROM Employee WHERE Ename LIKE '%a';

-- 7. Find highest and least salaries of all employees
SELECT MAX(Salary) AS Highest, MIN(Salary) AS Lowest FROM Employee;
```

Mnemonic: "CSIDDHL - Create Sum Insert Display Display List HighLow"

## Question 4(a) [3 marks]

Consider a following relational schema & give Relational Algebra Expressions for the following queries.

#### Answer:

```
Student (Enrollment_No,Name,DOB,SPI)

i. σ(SPI > 7.0)(Student)

ii. π(Name)(σ(Enrollment_No = 007)(Student))
```

Mnemonic: "SP - Select Project"

## Question 4(b) [4 marks]

Write a short note on partial functional dependency.

#### Answer:

| Concept    | Description  |
|------------|--|
| Definition | Non-prime attribute depends on part of composite primary key |
| Occurs in  | Tables with composite primary keys                           |
| Problem    | Causes redundancy and update anomalies                       |
| Solution   | Decompose into 2NF   |

**Example**: In table(StudentID, CourseID, StudentName, CourseName), StudentName depends only on StudentID (part of key).

Mnemonic: "PDPR - Partial Dependency Problems Resolved"

# Question 4(c) [7 marks]

**Explain need of Normalization? Discuss about 2NF with example.** 

#### Answer:

#### **Need of Normalization:**

| Problem          | Solution through Normalization    |
|------------------|-----------------------------------|
| Data Redundancy  | Eliminates duplicate data         |
| Update Anomalies | Prevents inconsistent updates     |
| Insert Anomalies | Allows independent data insertion |
| Delete Anomalies | Prevents loss of important data   |

### Second Normal Form (2NF):

- Must be in 1NF
- No partial functional dependencies

### **Example:**

```
Before 2NF:
StudentCourse(StudentID, CourseID, StudentName, CourseName)

After 2NF:
Student(StudentID, StudentName)
Course(CourseID, CourseName)
Enrollment(StudentID, CourseID)
```

Mnemonic: "NUID2 - Normalization Unifies Important Data to 2NF"

### Question 4(a OR) [3 marks]

Consider a following relational schema & give Relational Algebra Expressions for the following queries.

#### Answer:

```
Student(Enno, name, age, address)

i. \pi(\text{name})(\sigma(\text{address} = 'Surat')(\text{Student}))

ii. \pi(\text{name})(\sigma(\text{age} > 30)(\text{Student}))
```

# Question 4(b OR) [4 marks]

Define 1 NF? Explain 1NF with suitable example.

**First Normal Form (1NF)**: Each column contains atomic (indivisible) values, and each column contains values of a single type.

| Rule                | Description                       |
|---------------------|-----------------------------------|
| Atomic Values       | No multiple values in single cell |
| No Repeating Groups | No duplicate columns              |
| Unique Rows         | Each row must be unique           |

### **Example:**

```
Before 1NF:
Student(ID, Name, Subjects)
1, John, Math, Science, English

After 1NF:
Student(ID, Name, Subject)
1, John, Math
1, John, Science
1, John, English
```

Mnemonic: "ANU - Atomic No-repeat Unique"

## Question 4(c OR) [7 marks]

Define Transitive Dependency? Explain 3NF with suitable example.


#### **Answer**:

**Transitive Dependency**: Non-prime attribute depends on another non-prime attribute rather than directly on primary key.

### Third Normal Form (3NF):

- Must be in 2NF
- No transitive dependencies

| Before 3NF                            | After 3NF                      |
|---------------------------------------|--------------------------------|
| Student(ID, Name, DeptCode, DeptName) | Student(ID, Name, DeptCode)    |
| DeptName depends on DeptCode          | Department(DeptCode, DeptName) |

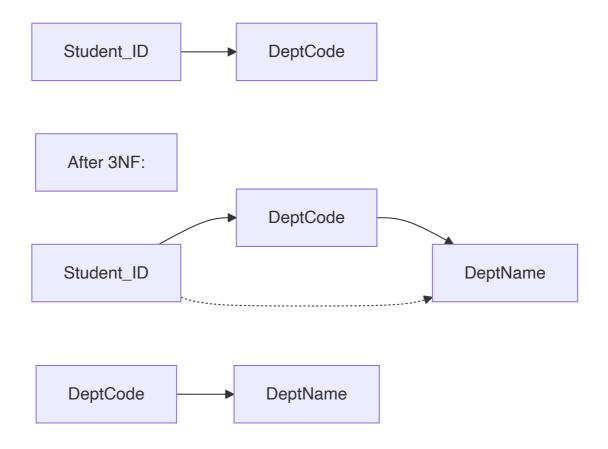

Mnemonic: "T3ND - Transitive Third Normal Form No Dependencies"

# Question 5(a) [3 marks]

Define Serializability? Explain rules of serializability?

Answer:

**Serializability**: Property ensuring concurrent transaction execution produces same result as serial execution.

| Rule                     | Description                                  |
|--------------------------|--|
| Conflict Serializability | No conflicting operations in different order |
| View Serializability     | Same read-write patterns as serial schedule  |

Mnemonic: "SCV - Serial Conflict View"

# Question 5(b) [4 marks]

**Explain Attributes of Implicit Cursors.** 

| Attribute | Description                                |
|-----------|--|
| %FOUND    | TRUE if last SQL affected at least one row |
| %NOTFOUND | TRUE if last SQL affected no rows          |
| %ROWCOUNT | Number of rows affected by last SQL        |
| %ISOPEN   | Always FALSE for implicit cursors          |

Mnemonic: "FNRI - Found NotFound RowCount IsOpen"

# Question 5(c) [7 marks]

Explain two phase locking protocol with suitable example.

#### **Answer:**


Two Phase Locking (2PL): Protocol ensuring serializability through two phases.

| Phase           | Description        | Rules                             |
|-----------------|--------------------|-----------------------------------|
| Growing Phase   | Acquire locks only | Can acquire locks, cannot release |
| Shrinking Phase | Release locks only | Can release locks, cannot acquire |

### **Example:**

Transaction T1:

- 1. Lock(A) Growing
- 2. Lock(B) Growing
- 3. Read(A), Write(A)
- 4. Unlock(A) Shrinking
- 5. Read(B), Write(B)
- 6. Unlock(B) Shrinking



Mnemonic: "2PGS - Two Phase Growing Shrinking"

### Question 5(a OR) [3 marks]

**Explain ACID properties of transaction.** 

| Property    | Description                             |
|-------------|---|
| Atomicity   | Transaction is all-or-nothing           |
| Consistency | Database remains in valid state         |
| Isolation   | Concurrent transactions don't interfere |
| Durability  | Committed changes are permanent         |

Mnemonic: "ACID - All Changes In Database"

# Question 5(b OR) [4 marks]

**Define Triggers? Explain advantages of triggers.** 

**Answer:** 

**Triggers**: Special stored procedures that automatically execute in response to database events.

| Advantage           | Description                |
|---------------------|----------------------------|
| Automatic Execution | Runs without explicit call |
| Data Integrity      | Enforces business rules    |
| Auditing            | Tracks database changes    |
| Security            | Controls data access       |

Mnemonic: "ADAS - Automatic Data Auditing Security"

# Question 5(c OR) [7 marks]

List down problems of concurrency control. Explain any two with suitable example.

**Answer**:

**Problems of Concurrency Control**:

| Problem             | Description                                   |
|---------------------|---|
| Lost Update         | One transaction's update overwrites another's |
| Dirty Read          | Reading uncommitted data                      |
| Non-repeatable Read | Different values read in same transaction     |
| Phantom Read        | New rows appear between reads                 |

### **Example 1 - Lost Update:**

```
T1: Read(A=100)

T2: Read(A=100)

T1: A = A + 50 (A=150)

T2: A = A + 30 (A=130) <- Lost T1's update

T1: Write(A=150)

T2: Write(A=130) <- Final value wrong
```

### **Example 2 - Dirty Read:**

```
T1: Write(A=200) [Not committed]
T2: Read(A=200) <- Dirty read
T1: Rollback <- A back to original
T2: Continues with wrong value
```

Mnemonic: "LDNP - Lost Dirty Non-repeatable Phantom"